





YBN. YBO. YBF (LPC)


Conventional common mounting base

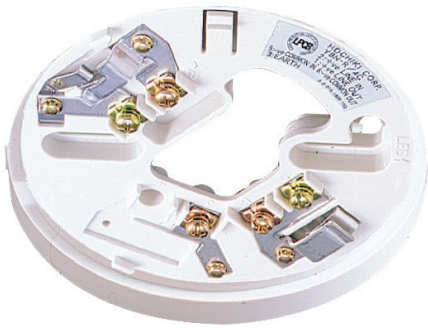

YBN-R/4C (LPC)

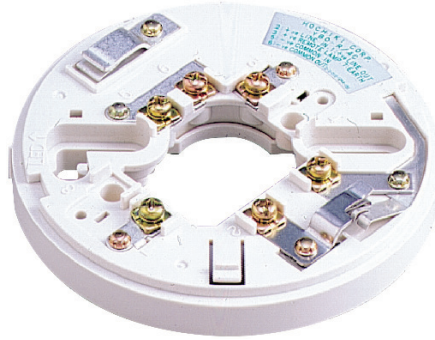

YBO-R/4C (LPC)
With Remote Indicator Output

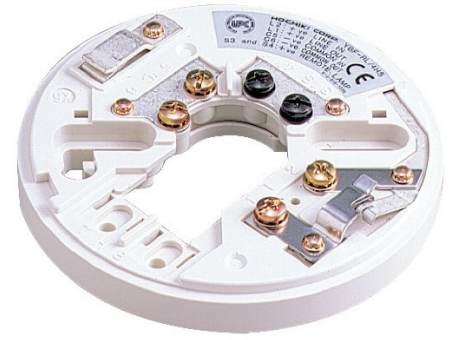

YBF-RL/4H5 (LPC)
With LED & Remote Indicator Output

Specification

Type	Surface Mount (Screw Type)	
Model	YBN-R/4C (LPC)	
	YBO-R/4C (LPC)	
	YBF-RL/4H5 (LPC)	
Operating Temp. Range	-10 °C to 50 °C	
Material	Self-Extinguishing Resin	
Color	White or Ivory	
Dimension	YBN-R/4C (LPC)	φ100 x 11mm
	YBO-R/4C (LPC)	φ100 x 13mm
	YBF-RL/4H5 (LPC)	φ100 x 13mm
Weight	YBN-R/4C (LPC)	Approx. 45g
	YBO-R/4C (LPC)	Approx. 60g
	YBF-RL/4H5 (LPC)	Approx. 45g
Country of Origin	Japan	
Suitable Detector	SLV, SOC, SLR, DCD, DFJ	

HOCHIKI ASIA PACIFIC PTE. LTD.

82 Ubi Ave 4 #06-02
Edward Boustead Centre, Singapore 408832
TEL: 65-6841-9728 | FAX: 65-6841-9781
URL : www.hochikiasiapacific.com

04/2020

HEAD OFFICE

10-43 Kamiosaki 2-Chome.
Shinagawa-Ku, Tokyo 141-8660 Japan
TEL: 81-(3)-3444-4116 | FAX: 81-(3)-3444-4167
URL : www.hochiki.co.jp

Specifications subject to change without notice